


THIS DOCUMENT IS THE PROPERTY OF Pan-link Technology (Shenzhen) co., Ltd. (HEREAFTER "Pan-link"). IT IS LENT AND IS TO BE RETURNED UPON REQUEST. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO Pan-link. THIS DOCUMENT AND ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON COPIED OR PUBLISHED WITHOUT Pan-link PRIOR WRITTEN CONSENT.

COPY RIGHT © 2007 Pan-link Technology co., Ltd

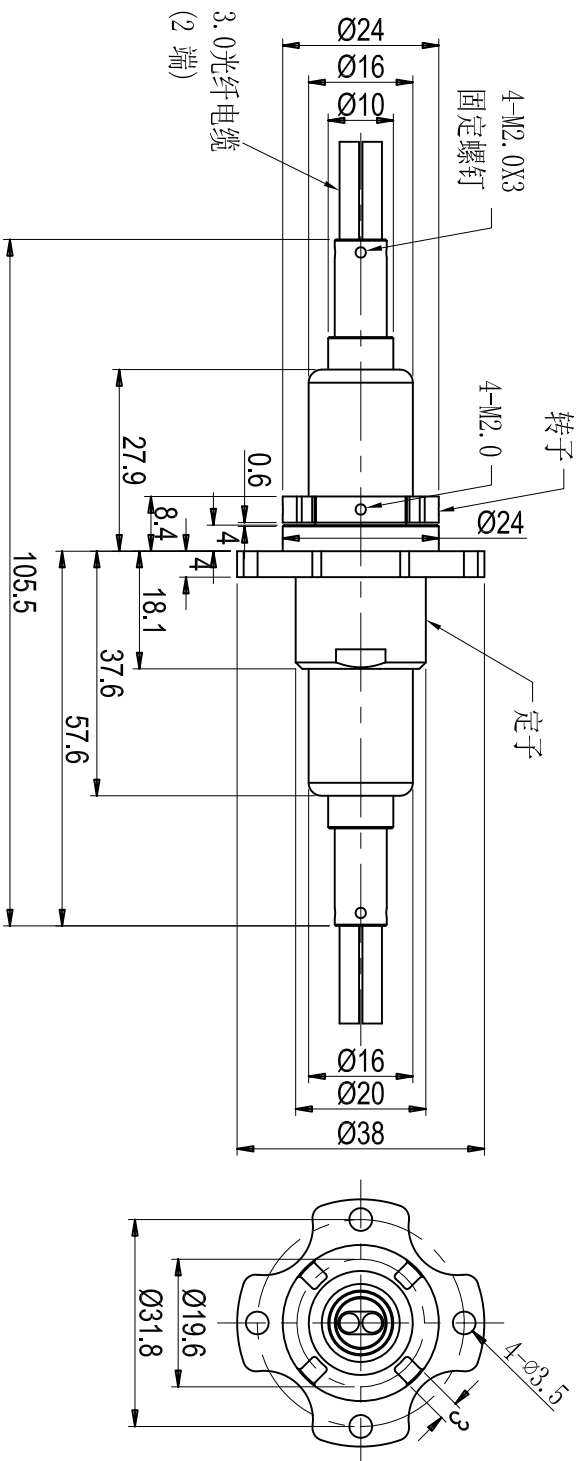

电气性能			
1	波长范围	1310/850nm or 1310/550nm	2 通道
3	插入损耗	<4dB	
4	插入损耗起伏	<1dB	
5	回波损耗	15dB	
6	光衰能量	23 dbm	
机械性能			
7	最大转速	100RPM	8 接触强度
9	预计寿命	200 million revolutions	10 启动扭矩
11	工作温度	-20°C~+72°C	12 贮存温度
13	防护等级	IP54	
材料/附件			
14	引线方式	$\varnothing 3.0$ Fiber cable or armor	15 接头类型
16	壳体材料	Stainless steel	17 尺寸
18	产品重量	100 g	

REV	LOC'T	DESCRIPTION OF CHANGE	CHG BY	APP BY	DATE

Pan-link Technology co., Ltd		MODEL NO.	UNIT IN MM
MATERIAL		DESCRIPTION	
FINISH/COLOR		SLIP RING ASSY	
QUANTITY	SCALE	DWG DATE	CHK DATE
0.333		2014-12-25	
TOL UNLESS SPECIFIED		PART NO.	
LINEAR		CAD FILE	
0-30 ±0.05		APP DATE	
>30-60 ±0.075		SHEET 1 OF 1	
60-100 ±0.1		REV. A0	
ANGLE		A4	
X° ±0.5°			