


THIS DOCUMENT IS THE PROPERTY OF Pan-link Technology (Shenzhen) co., Ltd. (HEREAFTER "Pan-link"). IT IS LENT AND IS TO BE RETURNED UPON REQUEST. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO Pan-link. THIS DOCUMENT AND ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON COPIED OR PUBLISHED WITHOUT Pan-link PRIOR WRITTEN CONSENT.

COPY RIGHT © 2007 Pan-link Technology co., Ltd

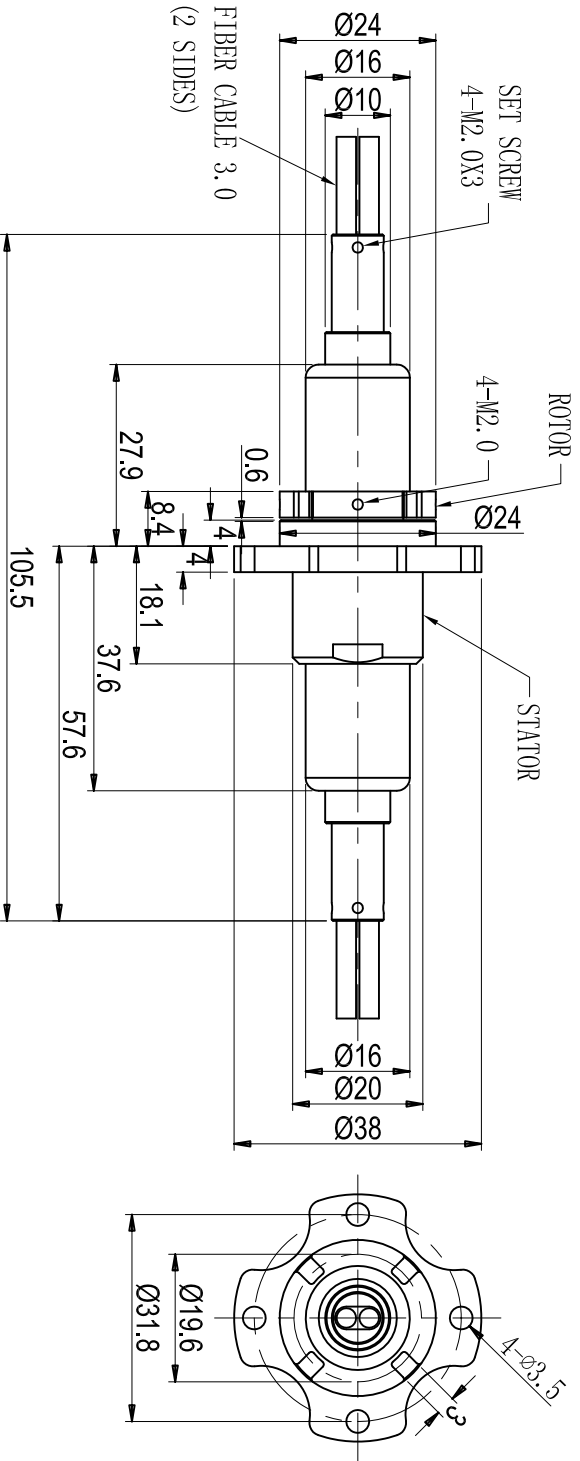

Electronic Specification		
1	Wavelength range	1310/850nm or 1310/1550nm
3	Insertion loss	<4dB
4	Insertion loss WOV	<1dB
5	Return loss	15dB
6	Estimated life cycle	23 dbm
Mechanical Specification		
7	Speed	100rpm
9	Life	200 million revolutions
Environmental adaptability		
11	Working temperature	-20°C~+72°C
13	IP Class	IP54
Material/Attachment		
14	Fiber types	Ø3.0 Fiber cable or armor
16	Housing material	Stainless steel
18	Weight	100 g

REV	LOC'T	DESCRIPTION OF CHANGE	CHG BY	APP BY	DATE

Pan-link Technology co., Ltd		MODEL NO.		UNIT IN MM	
MATERIAL		DESCRIPTION		SLIP RING ASSY	
FINISH/COLOR		TOL UNLESS SPECIFIED		REV.	
/color		LINEAR		A0	
QUANTITY		0-30 ±0.05			
SCALE		>30-60 ±0.075			
0.333		ANGLE			
		X° ±0.5°			
DWG		CHK		APP	
DATE		DATE		DATE	
2014-12-25					
				SHEET 1 OF 1	
				A4	